

STGCH6-SD






STGCH6



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Hinged rear door
- Sliding front doors or solid front
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Solid glass front that hinges at base – optional

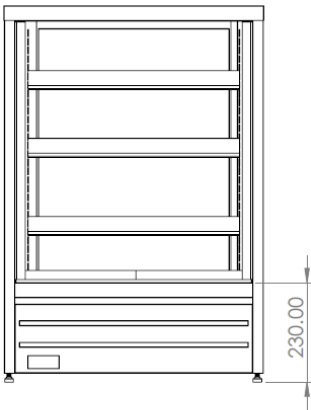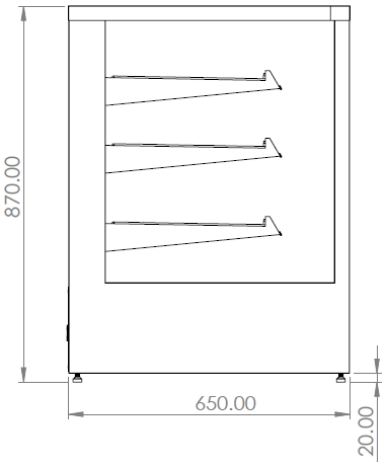

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL		CABINET			SHELVING	OPERATING TEMP	SHELF		BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG		DEG C	W X D	W X D		100MM UNITS	M²	Hz	KW 230V	AMP	NZ/AUS 10 AMP 3 PIN PLUG	UK 13 AMP 3 PIN PLUG	V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
STGCH6 STGCH6-SD	600	650	870	90	3 + BASE	75-85	490 X 350	560 X 420		74	1.18	50	1.3	5.4			220-240	700	730	1040	97

STGCH9-SD




STGCH9



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Sliding front doors or solid front
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Solid glass front that hinges at base – optional

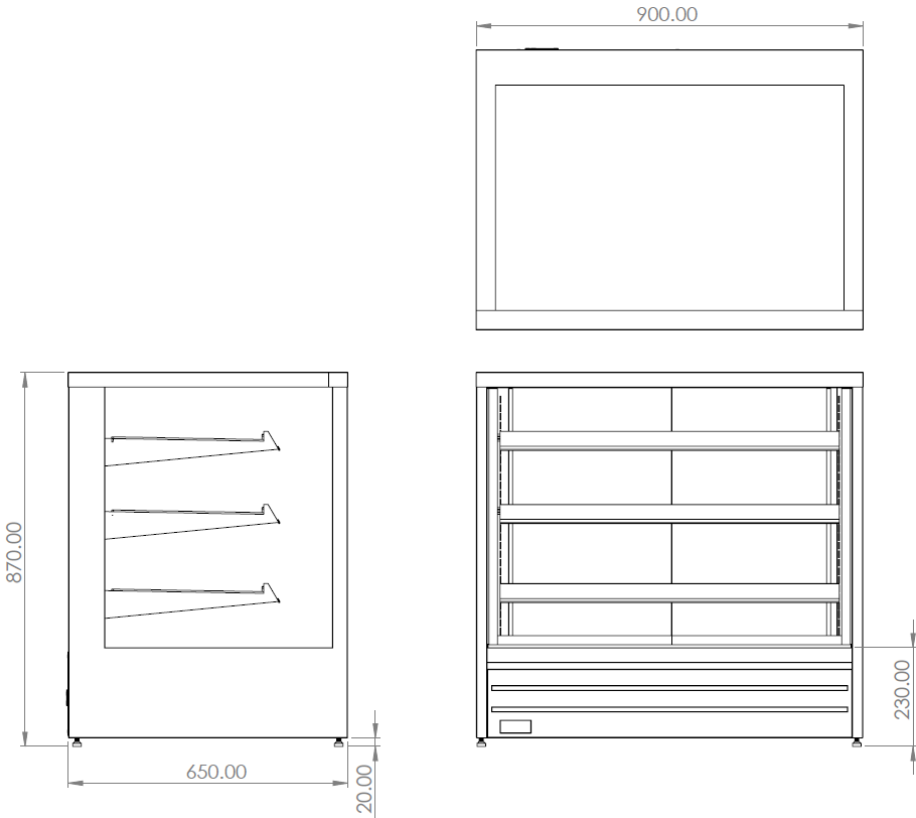

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG								KW 230V	AMP	NZ/AUS 3 PIN PLUG	UK 3 PIN PLUG		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
STGCH9 STGCH9-SD	900	650	870	112	3 + BASE	75-85	790 X 350	860 X 420	119	1.71	50	1.8	7.4	10 AMP 3 PIN PLUG	13 AMP 3 PIN PLUG	220-240	1000	730	1040	119




STGCH12-SD



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Sliding front doors or solid front
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Solid glass front that hinges at base – optional

STGCH12

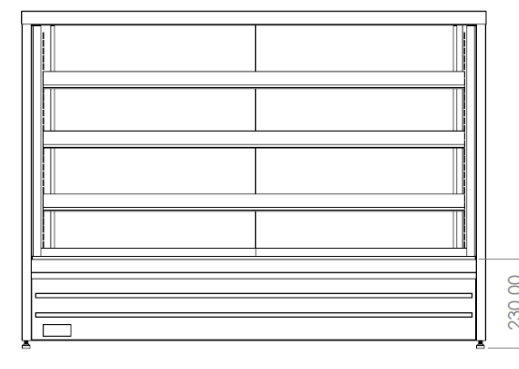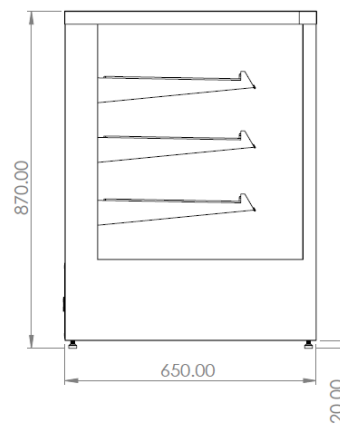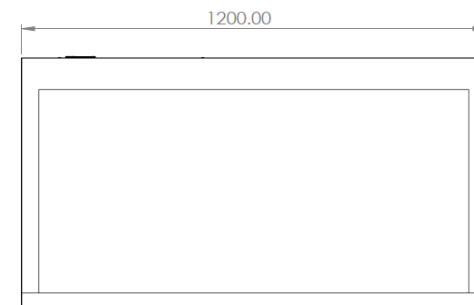

CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG		DEG C	W X D	W X D	100MM UNITS	M²	Hz	KW 230V	AMP	NZ/AUS 3 PIN PLUG	UK 3 PIN PLUG	V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT KG
STGCH12 STGCH12-SD	1200	650	870	128	3 + BASE	75-85	1090 X 350	1160 X 420	163	2.19	50	2.3	9.6	15 AMP 3 PIN PLUG	13 AMP 3 PIN PLUG	220-240	1300	730	1040	135