

BTGRF6




BTGRF6-SD



## PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

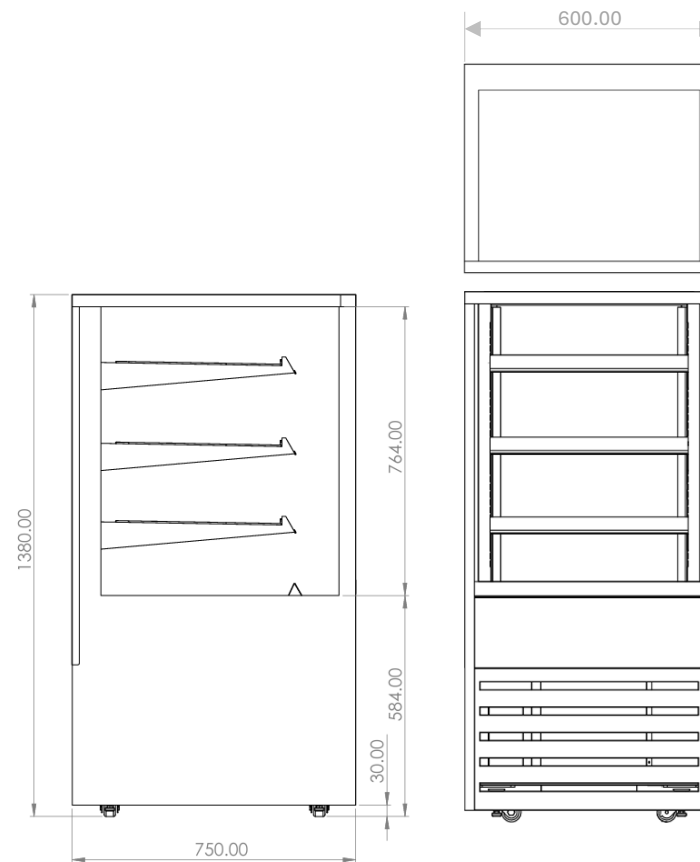

## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF		TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)			W X D	W X D					100MM UNITS	M <sup>2</sup>	Hz	KW 230V		AMP	NZ/AUS 10 AMP	UK 13 AMP	V
BTGRF6 BTGRF6-SD	600	750	1380	175	3 + BASE	3-5	490 X 445	540 X 510	86	0.92	50/60	R290	1.00	5.5	3 PIN PLUG	3 PIN PLUG	220-240	700	830	1550	180

BTGRF9




BTGRF9-SD



## PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

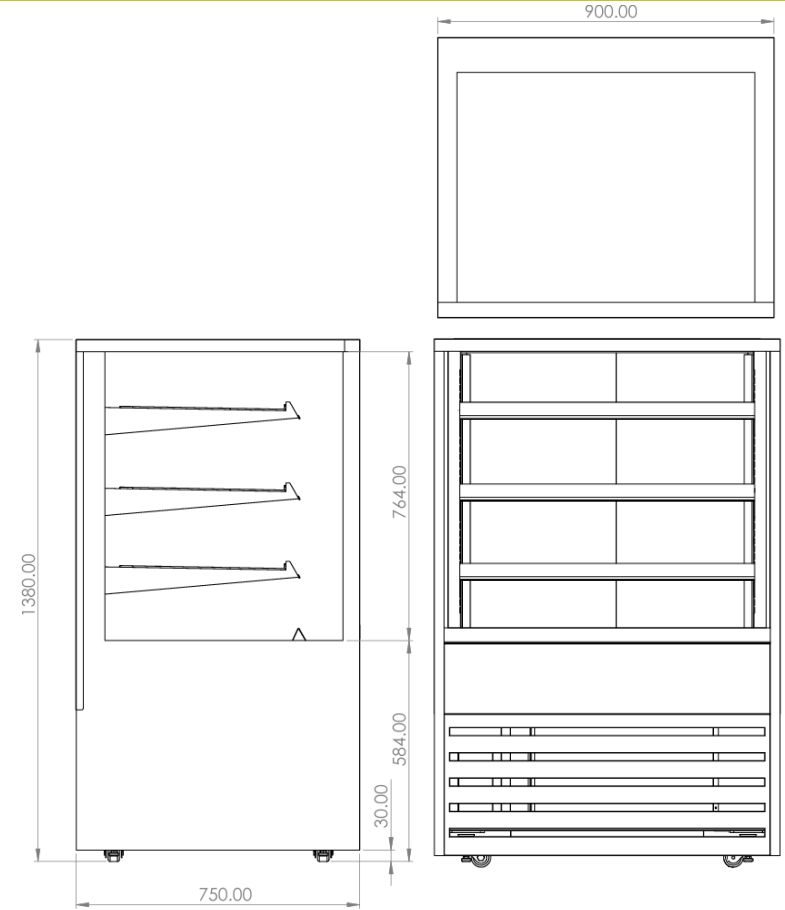

## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF		TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)			DEG C	W X D					W X D	100MM UNITS	M <sup>2</sup>	Hz		KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP
BTGRF9 BTGRF9-SD	900	750	1380	224	3 + BASE	3-5	790 X 445	840 X 510	136	1.48	50/60	R290	1.00	5.5	3 PIN PLUG	3 PIN PLUG	220-240	1000	830	1550	235

BTGRF12




BTGRF12-SD



## PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

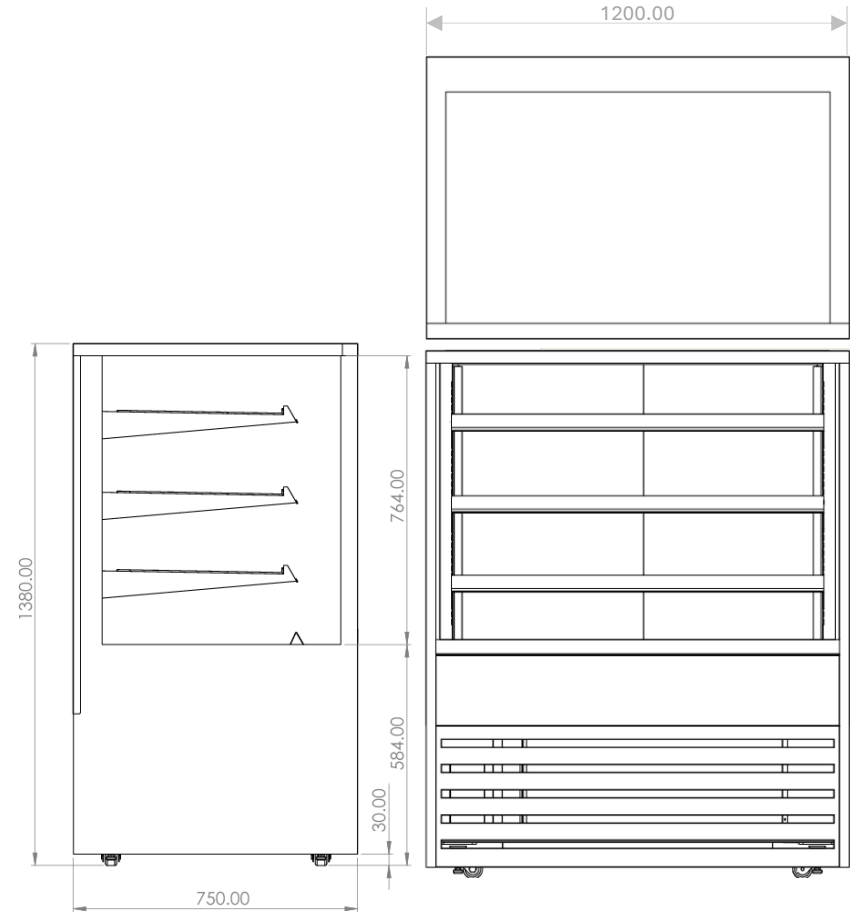

## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF		TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)			W X D	W X D					100MM UNITS	M <sup>2</sup>	KW 230V	AMP		NZ/AUS 10 AMP	UK 13 AMP	V	LENGTH (MM)
BTGRF12 BTGRF12-SD	1200	750	1380	273	3 + BASE	3-5	1090 X 445	1140 X 510	175	2.03	50/60	R290	1.20	6.6	3 PIN PLUG	3 PIN PLUG	220-240	1300	830	1550	279

BTGRF15




BTGRF15-SD



## PRODUCT FEATURES


- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

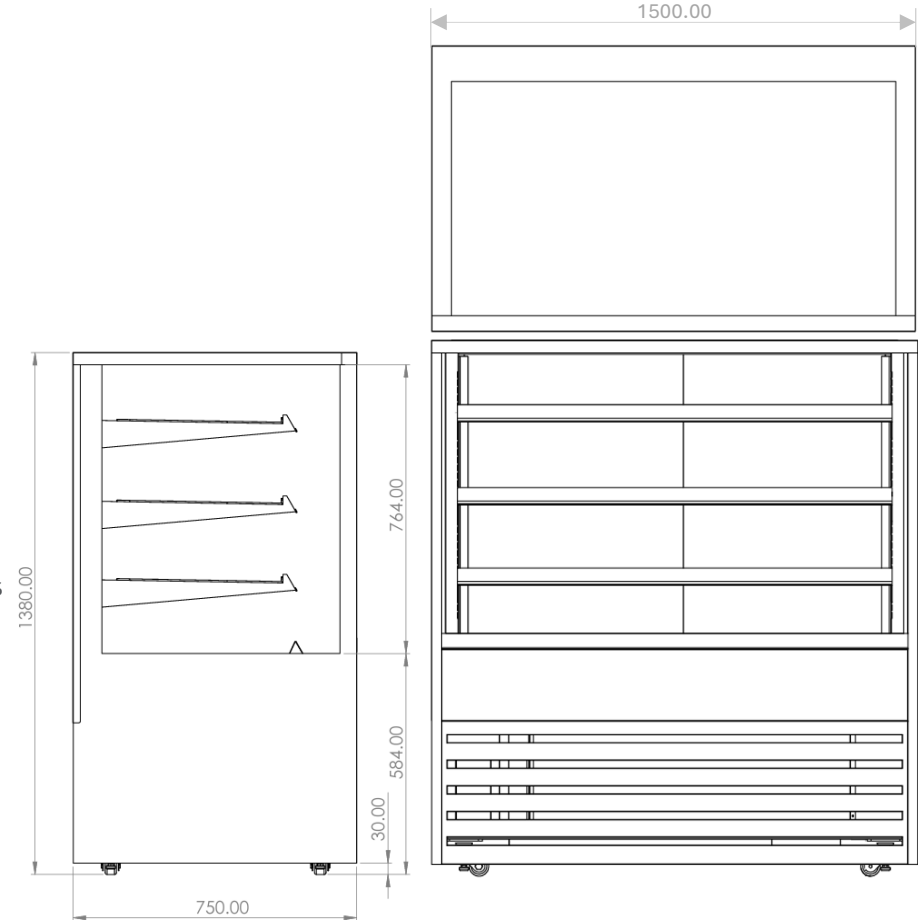

## CABINET DIMENSIONS AND SPECIFICATIONS


MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF		TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)			W X D	W X D					100MM UNITS	M <sup>2</sup>	KW 230V	AMP		NZ/AUS 10 AMP	UK 13 AMP	V	LENGTH (MM)
BTGRF15 BTGRF15-SD	1500	750	1380	329	3 + BASE	3-5	1390 X 445	1440 X 510	285	2.59	50/60	R290	1.52	8.3	3 PIN PLUG	3 PIN PLUG	220-240	1600	830	1550	337

## BTGRF18

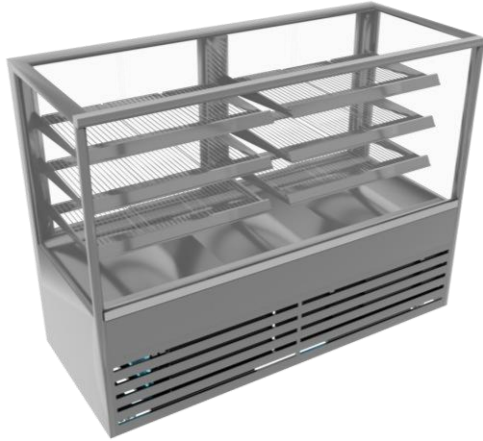

## PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

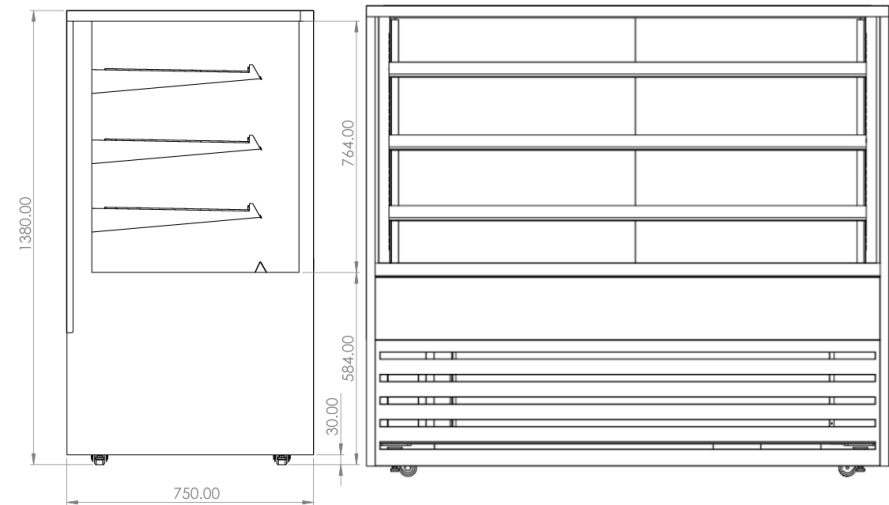

## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF W X D	BASE TRAY W X D	TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)									DEG C	100MM UNITS	M <sup>2</sup>	Hz		KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP
BTGRF18	1800	750	1380	380	3 X 2 + BASE	3-5	827 X 445	1740 X 510	325	3.14	50/60	R290	1.52	8.3	3 PIN PLUG	3 PIN PLUG	220-240	1900	830	1550	388