



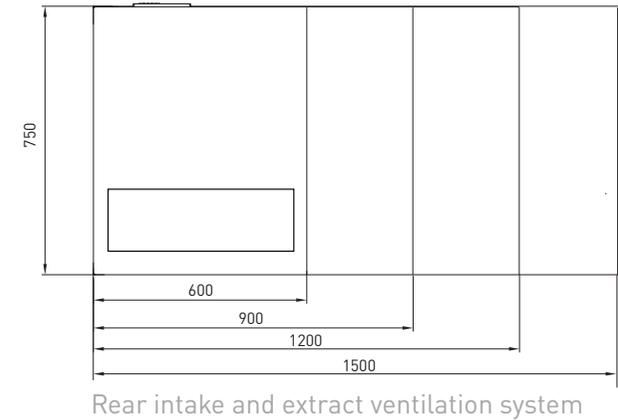

## OR BTGOR6 BTGOR9 BTGOR12


- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Two adjustable glass shelves
- Flat or angled shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Pigeon hole perspex screens

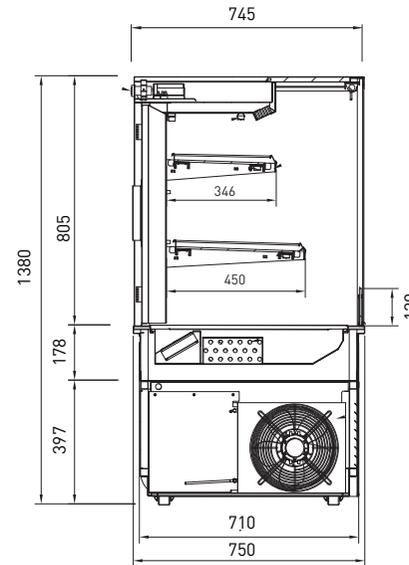

## CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT KG										KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGOR6	600	750	1380	175	2 + BASE	3-5	490 X 290 (TOP) 490 X 380 (2ND)	545 x 515	55	0.60	0.29	50/60 HZ	R290	1.38	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	700	830	1550	166
BTGOR9	900	750	1380	224	2 + BASE	3-5	790 X 290 (TOP) 790 X 380 (2ND)	845 x 515	114	0.96	0.45	50/60 HZ	R290	1.33	5.8	3 PIN PLUG	3 PIN PLUG	220-240V	1000	830	1550	207
BTGOR12	1200	750	1380	273	2 + BASE	3-5	1090 X 290 (TOP) 1090 X 380 (2ND)	1145 x 515	123	1.31	0.60	50/60 HZ	R290	1.74	7.6	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	1550	255

Maximum shelf load weight 15kg spread evenly

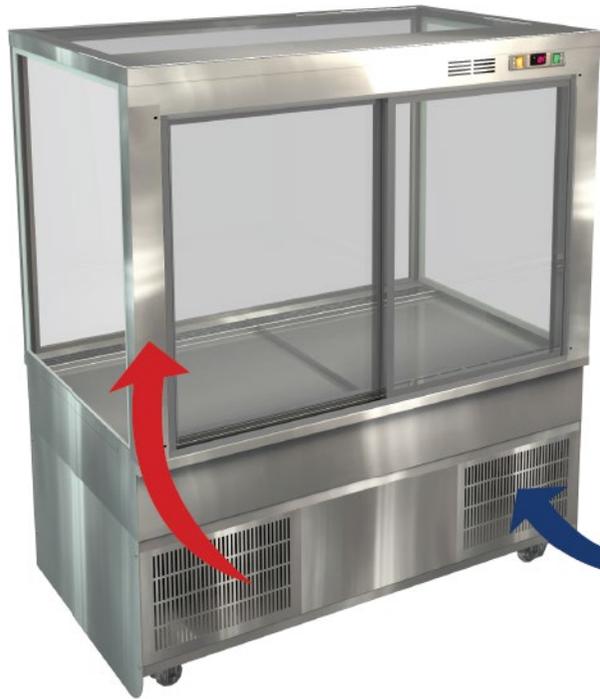

## Rear Ventilation


Rear intake and extract ventilation system  
Side mounted compressor

Front can be fully covered with custom panel joinery to suit environment

Ambient air intake through right rear internally ducted through condenser face


Exhaust air extract internally ducted trough left rear to environment

CUSTOMER SIDE

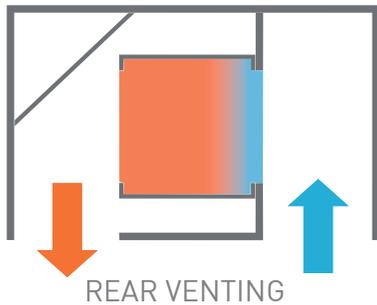


## Separation To Wall

A separation gap of 150mm must be allow to provide adequate ventilation if unit is being placed hard up against a wall

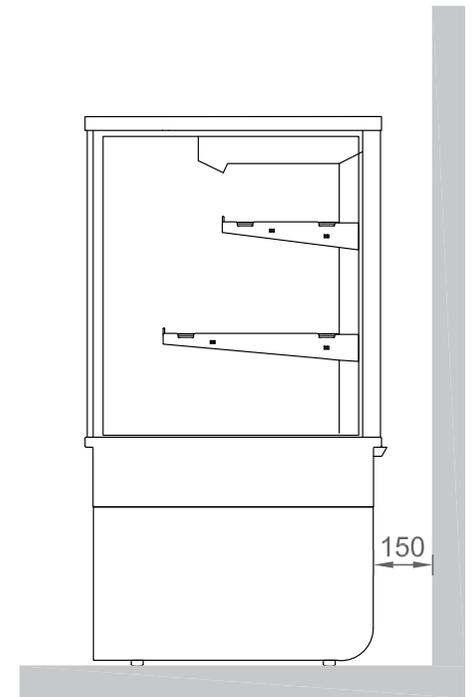


## Standard Configuration as shipped

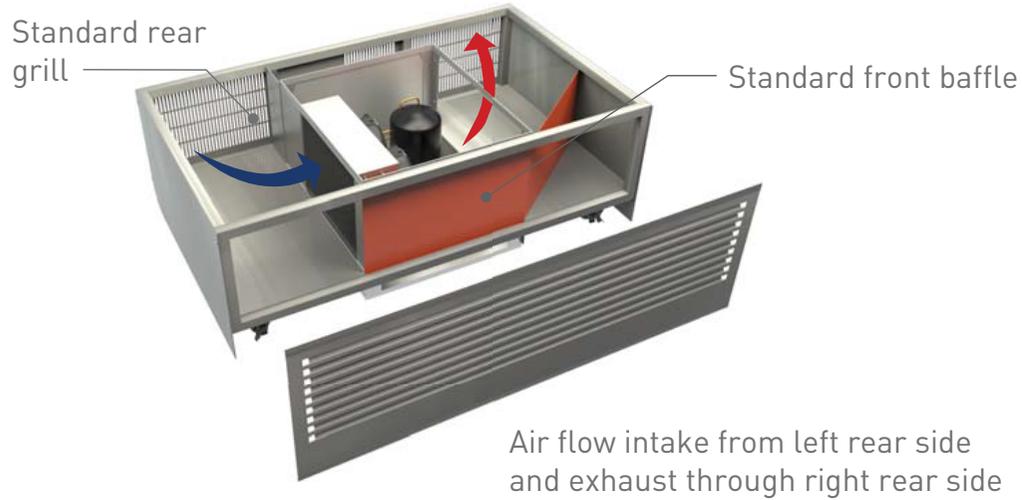

## Back to back with front venting



## Optional Configuration - Front to Front

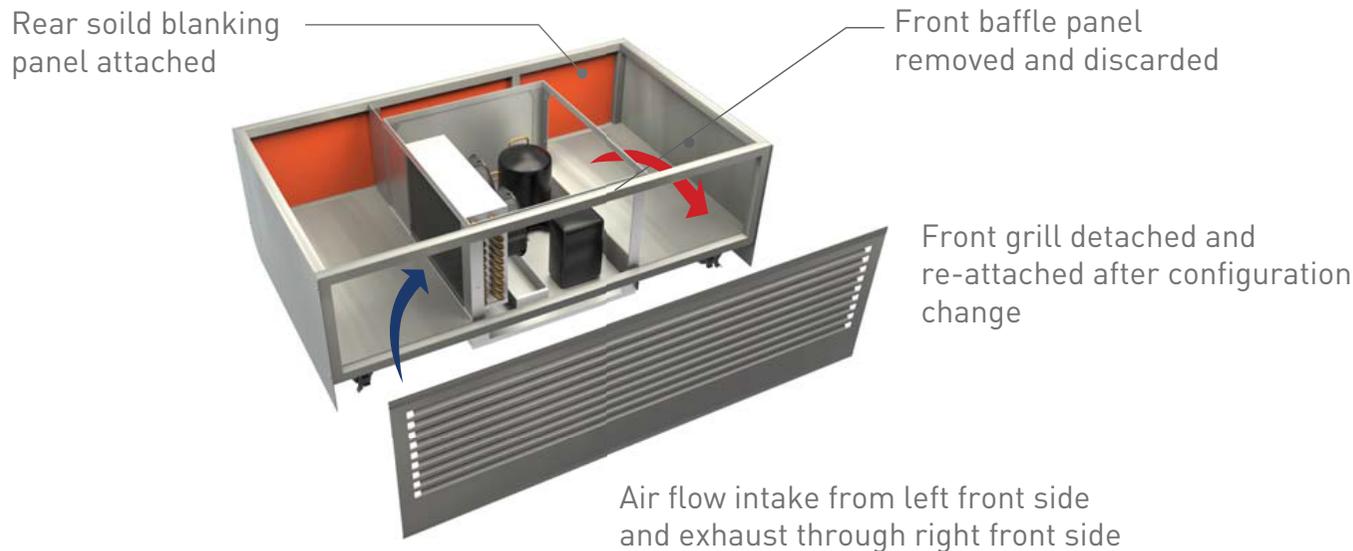


## Against a wall with front venting






Front venting -Rear blanking panel

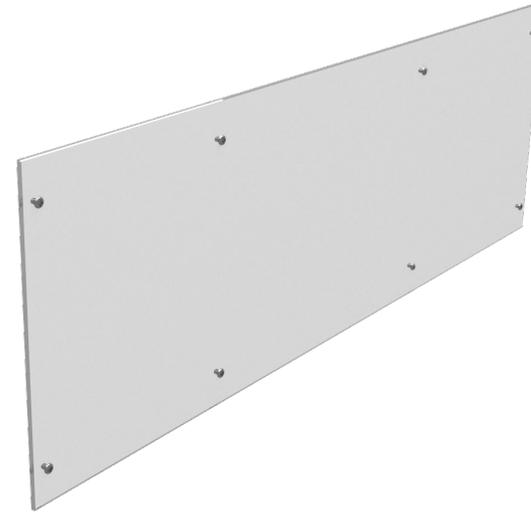

## Rear blanking panel

Panel fitted over rear vent panels to block airflow to allow for front venting.


MODEL	PANEL SIZE	
	LENGTH (MM)	HEIGHT (MM)
BTGRF6	600	305
BTGRF9	900	305
BTGRF12	1200	305
BTGRF15	1500	305
BTGRF15	1500	305

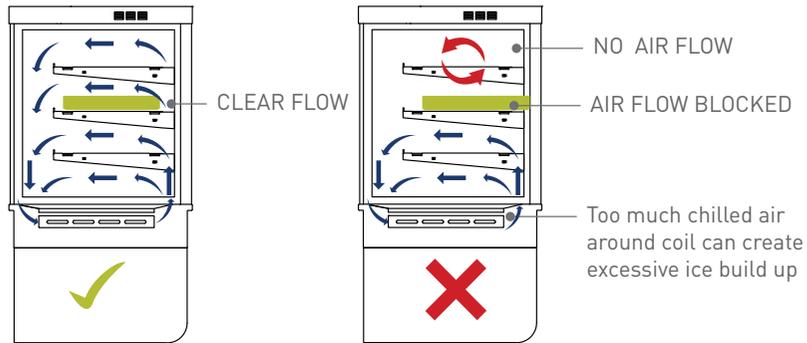

## CORRECT AIRFLOW


## IN CORRECT AIRFLOW

- Blocked air flow will retard operation on both HOT and COLD units
- Ensure trays or plates are not blocking air flow at rear

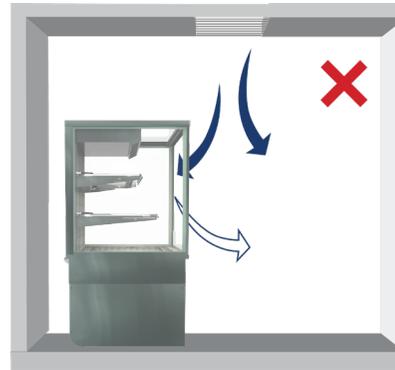


## Mechanical airflow

Mechanical air flows, such as diffusers and fans can disturb the air curtain on open fronted units causing failure

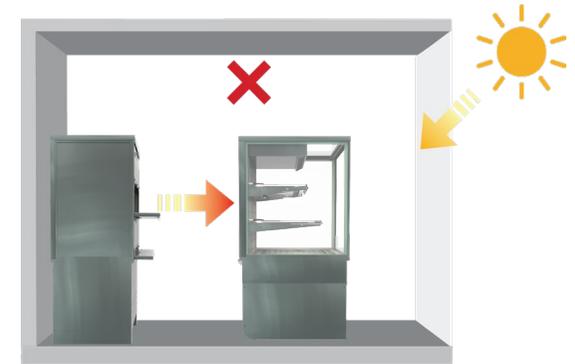


## Environmental conditions

Heat from other equipment and natural conditions, such as direct sunlight straight on units, can cause cooling to fail and overload compressor

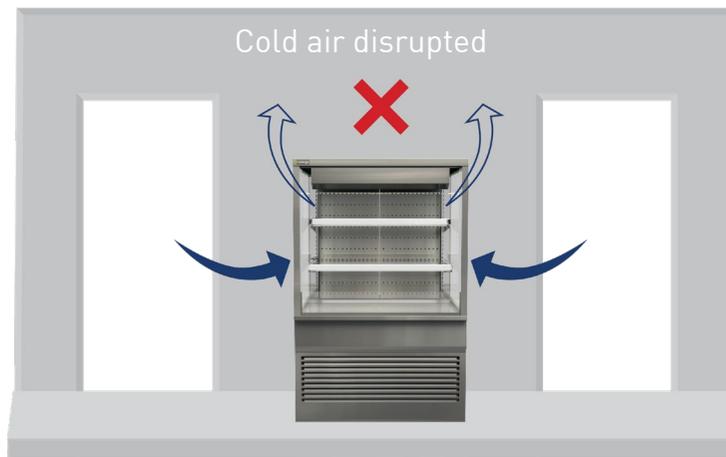

## Locations to avoid

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high wind
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas

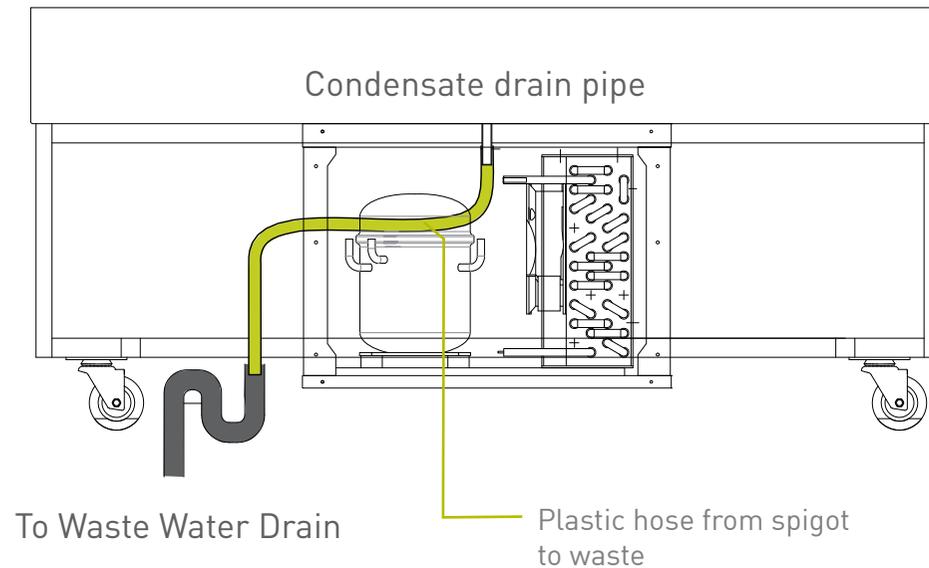

As standard units are self evaporating to a receptacle in the condenser unit. In areas of high humidity it is recommended by-passing the evaporator dish. A plastic hose can be attached to the end of the condensate drain and re-directed as shown.

## PLUMBED DRAINAGE TO WASTE

- Plumbed to a waste following all local plumbing and building codes
- Building waste by client
- Preferred method in high humidity conditions

## DRAINAGE RECOMMENDATIONS for high humidity locations

TO BE CONSIDERED FOR  
HIGH HUMIDITY SITES  
WITH ACCESS TO DRAINAGE



### Parts removed

Castors, front and side panels removed. Rear panels / grill remain for personnel safety.

### Dropped Into Benchtop

Unit is dropped in to hole cut in bench top and supported by front and rear flange of unit.

MODEL	CUT OUT SIZE
BTG6	615 X 720
BTG9	915 X 720
BTG12	1215 X 720
BTG15	1515 X 720



### Placed Into Benchtop from rear

Unit is slid into custom built frame from rear and supported by the sides of the unit base frame. L shaped supports shown in red in this example.






## SELF SERVICE SYSTEM

USED WITH SLIDING FRONT DOOR OPTION

- Each unit is self contained
- Roll-in - Roll-out
- Install in minutes
- No on site joinery work required
- Ease of cleaning and servicing
- Mobile and flexible
- Easy to upgrade front panel design
- Custom branding strip
- Rear service or against wall
- All parts as optional component kits
- Ideal solution for temporary events

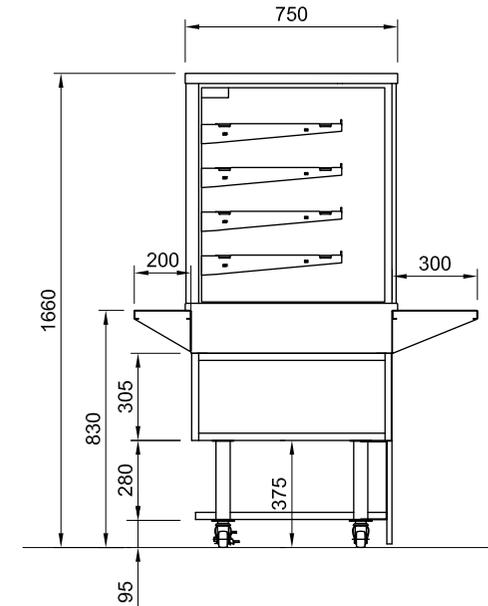

Optional bottom shelf kit for chilled units  
Ensure chilled units are kept well ventilated

Vent required through front panel

Optional bottom meltica shelf kit - BY OTHERS




Optional rear loading shelf kit  
200mm deep

Optional bottom meltica shelf kit - BY OTHERS

## Top Mounted Controller Panel

For against wall installations  
Sold individually

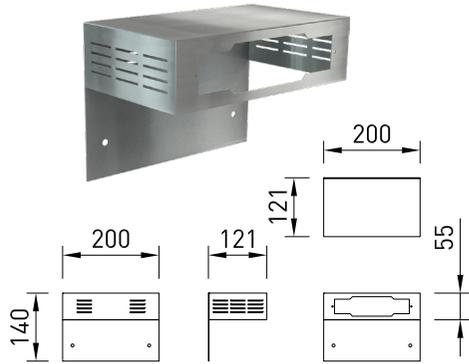

## Base Tray - Heated Units

Stainless Steel  
For heated units  
Sold in pairs




## Tong Holder

Stainless Steel  
Drop into counter tray race  
Sold individually




## Bag Holder

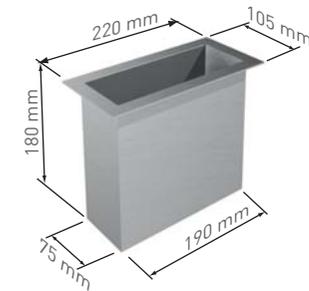

## Front and Rear Work Shelves


Stainless Steel  
Sold individually

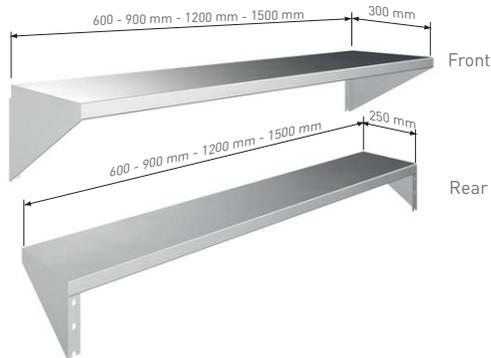

## Castor Extension Kit

Increases cabinet height to 1660mm

Set of four, uses existing castors, includes fixing bolts and washers

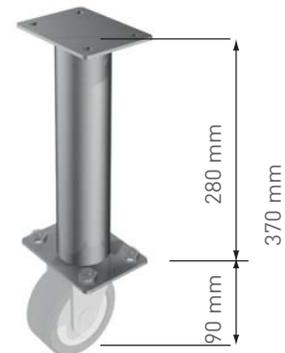


## Humidity Dish

Stainless Steel  
Perforated lid is removable




## Glass Shelf Options

Standard wire racks are removed and replaced with 6mm toughened glass panes

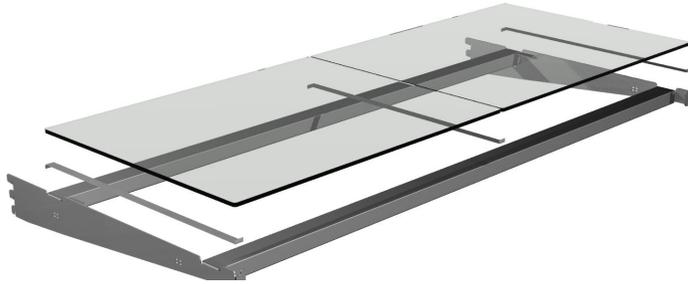

Stainless Steel glass shelf support bracket

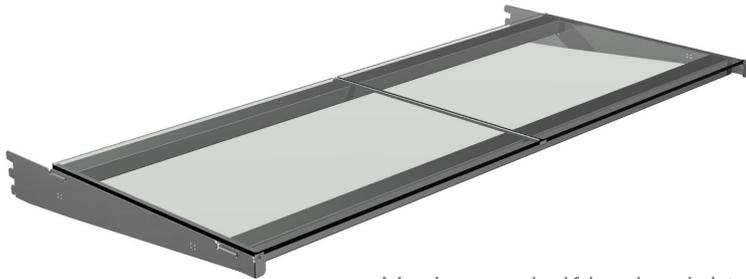


Maximum shelf load weight 15kg spread evenly

MODEL	GLASS	WIDTH MM	DEPTH MM	PER SHELF PANES	SHELVES	TOTAL PANES
BTGRF6	6MM TOUGHENED - POLISHED EDGES	240	430	2	3	6
BTGRF9	6MM TOUGHENED - POLISHED EDGES	390	430	2	3	6
BTGRF12	6MM TOUGHENED - POLISHED EDGES	540	430	2	3	6
BTGRF15	6MM TOUGHENED - POLISHED EDGES	690	430	2	3	8
BTGHT6	6MM TOUGHENED - POLISHED EDGES	240	430	2	4	8
BTGHT9	6MM TOUGHENED - POLISHED EDGES	390	430	2	4	8
BTGHT12	6MM TOUGHENED - POLISHED EDGES	540	430	2	4	8
BTGHT15	6MM TOUGHENED - POLISHED EDGES	690	430	2	4	8

## Pie Trays


Stainless Steel Construction

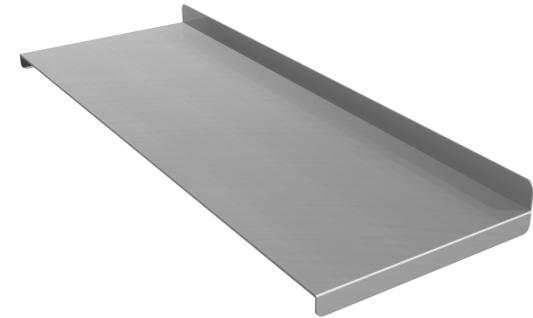


PIE TRAYS					
MODEL	NO. OF SHELF TRAYS	WIDTH MM	DEPTH MM	PER SHELF	TOTAL
BTGHT6	4 PER SHELF	120	445	4	16
BTGHT9	6 PER SHELF	130	445	6	24



Shelf with ticket strip attached

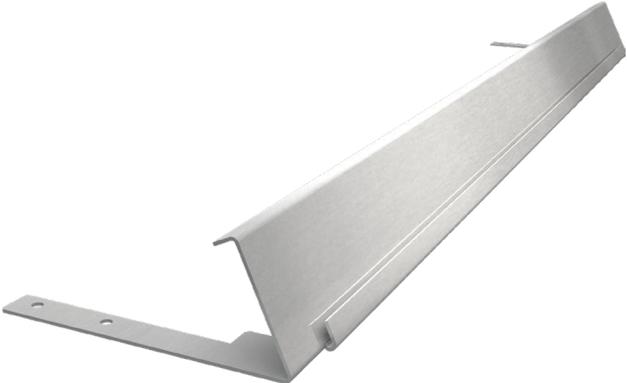

**Ticket Strip**  
Stainless Steel  
Attaches to shelf frame

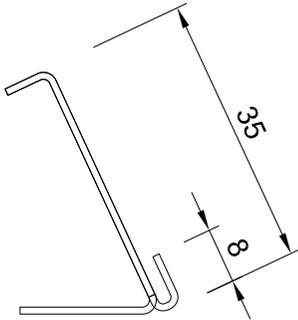

End Profile

**Lengths**

CABINET LENGTH MM	TICKET STRIP LENGTH
600	475
900	775
1200	1075
1500	1375
1800	810 X 2

**Price Tabs**

Stainless Steel  
Write on with marker or adhesive tape  
Measure 60mm x 30mm  
Sold in packs of 20



## OR OH Units - Unit Spacer

For OH and OR units. Provides a 100mm space between open fronted heated and chilled units to prevent the transfer of hot and cold air which can reduce performance.

Attached to the bottom side of one unit using existing screws on side panel. screws are removed and spacer is screwed in place.



## OR Units Rear door locking plate

For against wall or back to back installations used to prevent rear hinged doors from being opened.


Rear door handles are removed and discarded and plate is screwed in place.





## Wall Spacer Brackets

Cossiga wall spacer bracket accessory attaches to rear of unit to provide correct separation to a wall.

Part No. CA 54035 (Two brackets per kit)

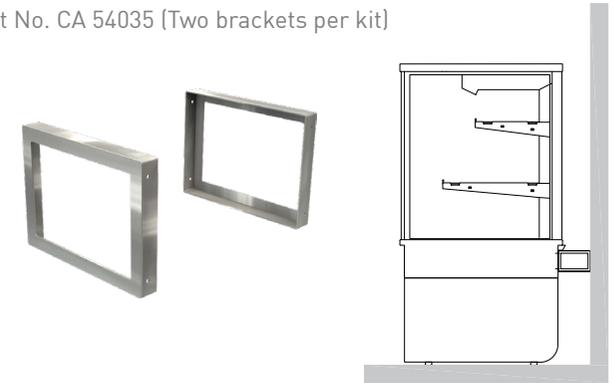

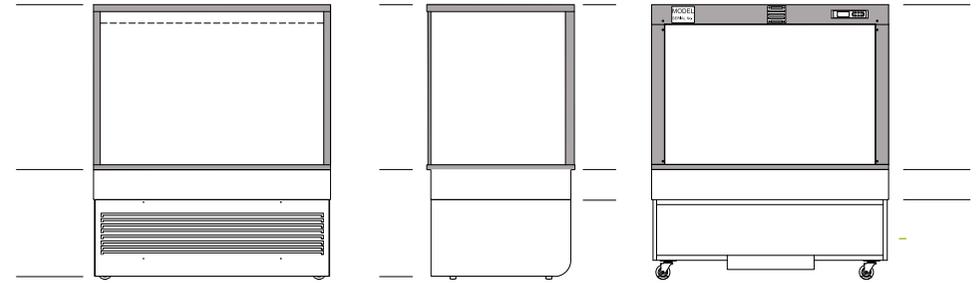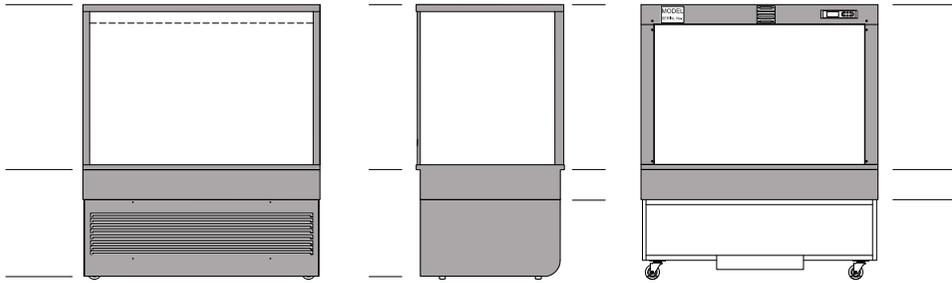


## FREE STANDING

all exterior visible areas covered

## FREE STANDING BEHIND NIB WALL

all exterior top visible areas covered

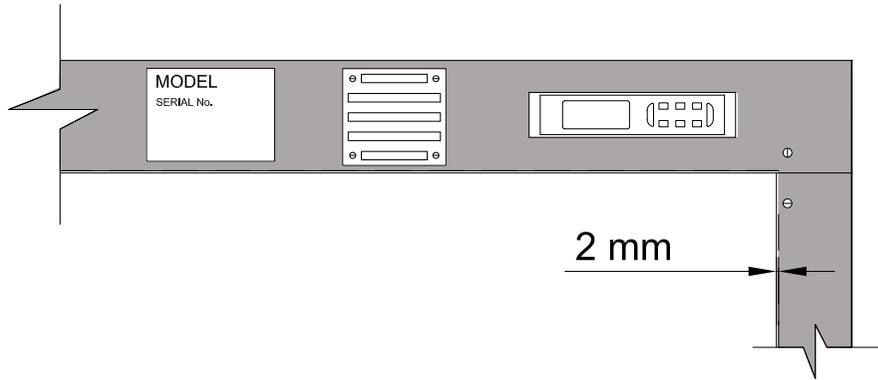

2mm gap left around rear frame

Rear of units cut around serial number plate, exhaust fan and controller

## WRAP TRIMMING

